

Performa® Series Proximity Plus® Cards and Key Tags




Globally accepted 13.56 MHz operating frequency
Compatibility with Sielox's Performa® readers
Pre-programmed customer-specific ID numbers
Available in clamshell or graphics-quality direct print


AC-12 Series

Sielox's Performa® Proximity Plus® cards set the standard for performance and cost-effective solutions for access control. Utilizing the globally accepted frequency of 13.56 MHz ensures compatibility with Sielox's Performa® readers.

Sielox's innovative flipchip assembly design provide for the highest reliability proximity cards available. Performa Proximity Plus cards utilize a passive, no-battery design allowing for an infinite number of reads.

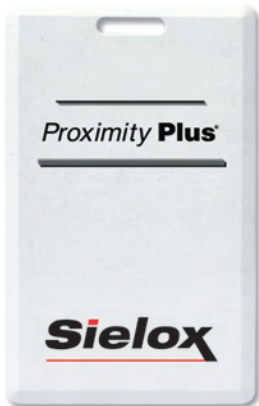

Clamshell

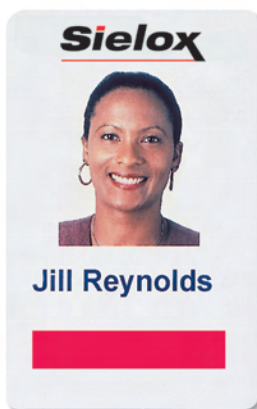

Graphics-Quality
Direct Print



Key Tag

Performa® Series Proximity Plus® Cards and Key Tags

Product Specifications

Typical Read Range

Up to 5" with Performa® Proximity Switch Plate Reader (13 cm)

Up to 4" with Performa® Proximity Mullion Mount Reader (10 cm)

Operating Temperatures

-4°F to + 158°F

20°C to + 70°C

Model Numbers


AC-12 (Clamshell)

AC-12P (Graphics-Quality Direct Print)

AC-12M (Graphics-Quality Direct Print w/Magnetic Stripe)


AC-12T (Key Tag)

0.070"

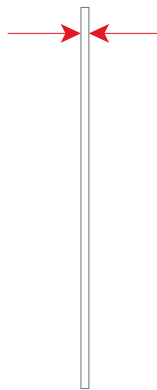


Side View
Clamshell

0.030"

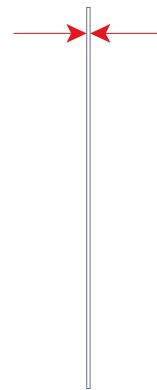


Side View
Graphics Quality
Direct Print

0.057"

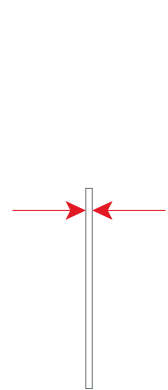

Side View
Key Tag

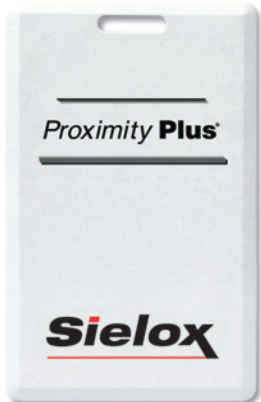

2.12"
Clamshell



2.12"
Graphics-Quality
Direct Print
*(also available with
Magnetic Stripe)*

3.37"



1.182"

1.770"
Key Tag

Sielox

Sielox
170 E 9th Ave
Runnemede, NJ 08078

800-424-2126 Toll Free
856-939-9300 Phone
856-939-9309 FAX
www.sielox.com